


# CHQ-SZM2(SCI)

## Addressable Single Zone Module

### Features

- ▶ Loop powered with single loop address
- ▶ Up to 6 Conventional Detectors
- ▶ Single loop address
- ▶ Remote LED output
- ▶ Fully monitored for short and open circuit faults
- ▶ DIN rail version available
- ▶ Both models feature an integral short-circuit isolator
- ▶ Both models approved by LPCB & VdS.

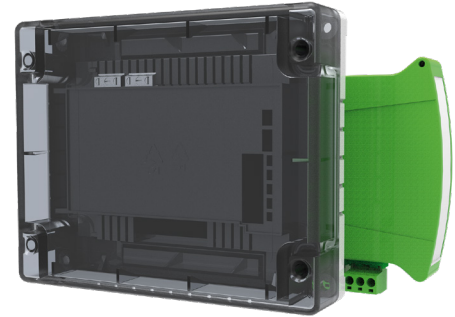

### Description

Model CHQ-SZM2(SCI) is a Single Zone Monitor designed to allow up to 6 conventional detectors to be interfaced to Hochiki's ESP analogue addressable system. The unit is also available as a DIN Rail mountable version; both modules feature an integral short-circuit isolator. The module utilises simple DIL switches for reliable addressing. A back box is also

available (CHQBACKBOX) which, when used in conjunction with the CHQ-SZM2(SCI), increases the IP rating to IP65.

The conventional zone on the module does not support any line continuity options; if Call Points are being interfaced they should be wired at the beginning of the zone.

### Specification

Ordering codes	CHQ-SZM2(SCI) (enclosed module), CHQ-SZM2/DIN(SCI) (DIN module)		
Operating voltage	17-41 VDC		
Quiescent current	260 µA		
Current consumption	22 mA + 20% (polling)		
Current in short circuit	8 mA		
Maximum short circuit current (Loop)	1 A		
EOL device	TE-RH-E (polarity conscious)		
Zone voltage	15.3 V - 17.1 V		
Zone resistance	50 Ω (Max)		
Zone capacitance	0.3 µF (Max)		
Detectors per zone	DCA, DFB, DFE – No limit. SLG, SLK, SLR, SIF, SIH, SIJ, DCC, DCD, DFJ – 6 max. SPB-ET, SPC-ET or SRA-ET– Only one and no other detectors. HF-24 – only one and no other detectors, DRD-E – 3 max, CCP-E – No limit		
Operating temperature range	-10°C to +50°C		
Storage temperature range	-30°C to +60°C		
Max humidity	95% RH Non condensing (at 40°C)		
Weight (g) Dimensions (mm)	CHQ-SZM2(SCI)	328 (+235 with CHQ-BACKBOX)	(with lid) L 157 x W 127 x D 35 (with lid and backbox) D 79
	CHQ-SZM2(SCI)	114	L 108 x W 119 x D 24

Fire alarm control panel compatibility required for these products.



For further information visit our website. Hochiki reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki to be a complete and up-to-date description. Check online for current version.