



Check Valve


SG-227EA / SG-FK5112 Fire Extinguishing System



DN 50

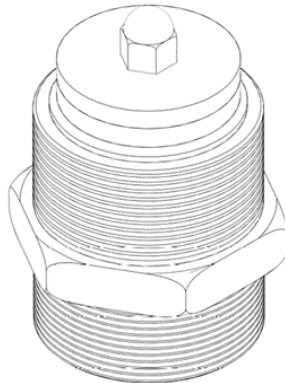

DN 65

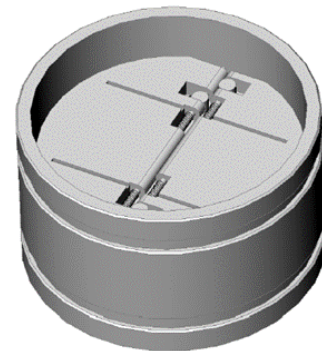

DN 80

Specification

General Description	Prevent agent loss when discharging while cylinder is removed for maintenance
UL Listing	EX28621
Material	Gun Metal / Zinc-nickel / Brass

Part Number	SG101-GM-050-UL	SG101-GM-065-UL	SG101-MS-080-UL
Name	DN50	DN65	DN 80
Overall Length, A (mm)	560	760	100
Material	Gun Metal		Body - Zinc-nickel plated Clapper - Brass
Seat	Nylon		-
Washer	Zinc Plated Mild Steel		-
Nut	Stainless Steel		-
Spline	Stainless Steel		-
Temperature Range	-10 °C to 60 °C		-10 °C to 60 °C
Inlet and Outlet Connections	2" BSP	2-1/2" BSP	6" Groove Coupling
Equivalent Length (m)	9.0	10.0	-

Note: All equivalent lengths given in Schedule 40, black pipe.

HOCHIKI ASIA PACIFIC PTE. LTD.

82 UBI Ave 4 #06-02

Edward Boustead Centre, Singapore 408832 TEL: 65-6841-9728 |

FAX: 65-6841-9781 URL : www.hochikiasiapacific.com

02/2023



Approval / Compliance:

Component of FM & UL Listed SG Fire Systems

Specifications subject to change without notice.