


# Discharge Valve Assembly

SG-227EA / SG-FK5112 Fire Extinguishing System

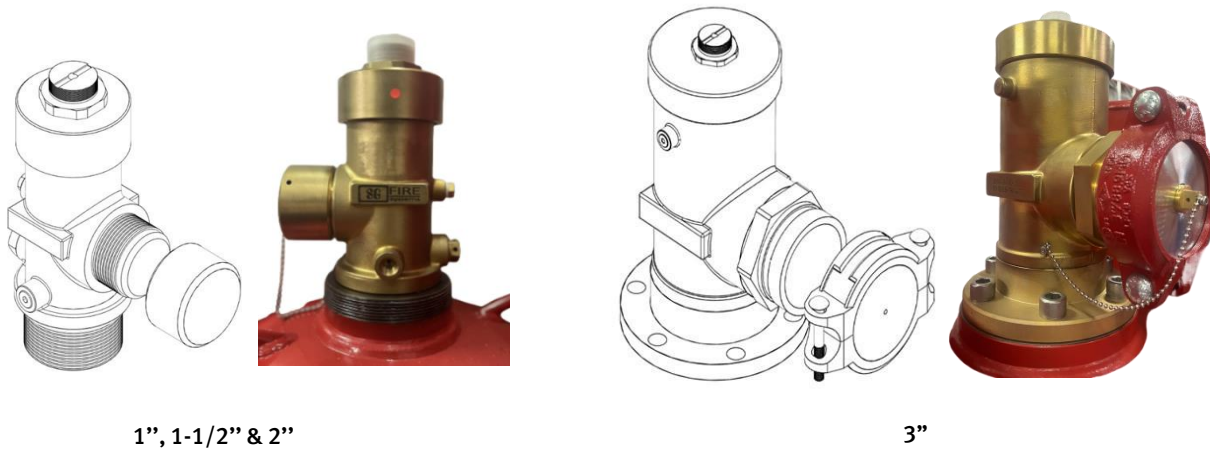

1", 1-1/2" & 2"

3"

## Specification

General Description	Release of agent from the cylinder to manifold
> Ref/CRJA	Brass

Part No.	SG100-GM-025-UL SG100-GM-025-VC	SG100-GM-038-UL SG100-GM-038-VC	SG100-GM-050-UL SG100-GM-050-VC	SG100-GM-080-UL SG100-GM-080-VC
Valve Size	1"	1-1/2"	2"	3"
Valve Body Material	Brass	Brass	Brass	Brass
Temperature Range	-10 °C to 60 °C	-10 °C to 60 °C	-10 °C to 60 °C	-10 °C to 60 °C
Actuator Connection	1-1/4" X 18UNEF	1-1/4" X 18UNEF	1-1/4" X 18UNEF	1-1/4" X 18UNEF
Pilot Hose Connection	1/8" NPT	1/8" NPT	1/8" NPT	1/8" NPT
Pressure Gauge Connection	1/8" NPT	1/8" NPT	1/8" NPT	1/8" NPT
Valve Outlet Connection	1-7/16" - 12 UN	1-7/8" - 12 UN	2-1/2" - 12 UN	G 3"
				SG005-BR-075-XX Flange for 3" Valve (TPED Requirement)