


HOCHIKI FirePro.

FNX-20T

Condensed Aerosol Generators

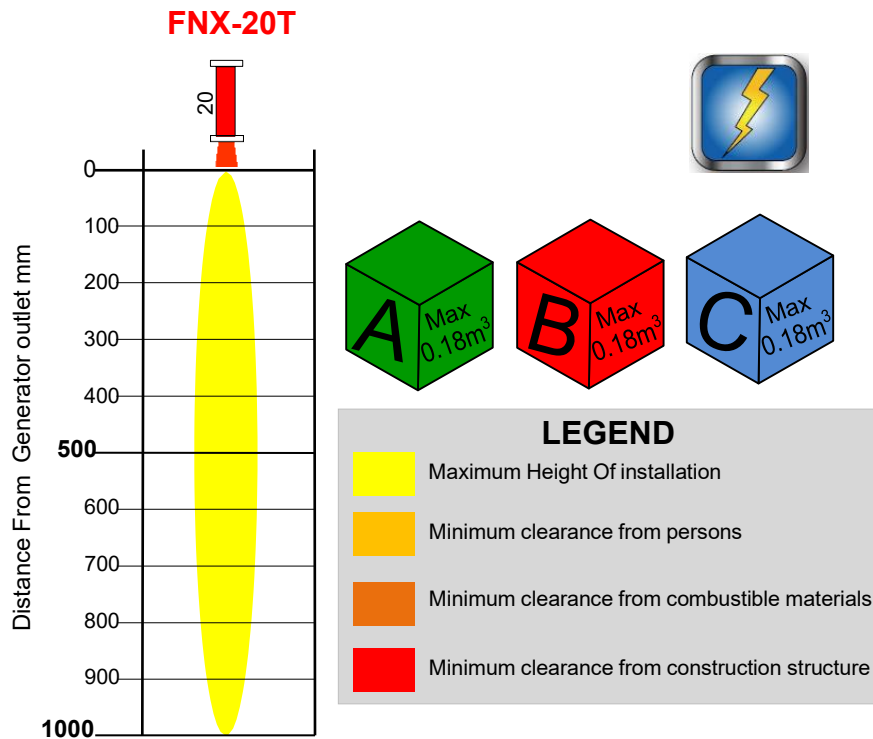

Technical Data				
Mass of FPC (Aerosol Generating Solid Compound)	20 g			
Generators gross weight	Weight	Tolerance		
	310 g	± 5%		
Activation mode/s	Electrically			
Value of activation	1.5 V DC , 0.8 A			
FPC activation device	Heating elements with 1.6-3.6 Ω Resistance			
Activation line supervision current (Max)	5 mA			
Aerosol discharge time	Min.	Max		
	3 seconds	6 seconds		
Number of discharge outlet	1			
Generator dimension	Height	Diameter		
	165 mm	32 mm		
Self-activation temperature of FPC	300° C			
Classes of Fire (NFPA 2010)	A	B	C	D
	√	√	√	NO
Generator Coverage Constraints	Min ht: 0.45 m		Max area: 0.55 m ²	Max throw: 1.14 m
Maximum height of installation	1.0 m			
	From persons	From combustible material	From Generator's Casing	
Minimum clearance (mm)	0 mm	0 mm	6.4 mm	
	ODP ¹	GWP ²	ALT ³	
Environmental parameters	Zero	Zero	Negligible ⁴	
	Electrical conductivity	Corrosion	Oxygen depletion After discharge	
Technical Parameters	Nil up to 75KV	Negligible ⁴	Negligible ⁴	
	1	ODP: Ozone Depletion Potential	3	ALT: Atmospheric Life Time
Note	2	GWP: Global Warming Potential	4	Within the parameters for use

HOCHIKI ASIA PACIFIC PTE. LTD.

ADD: 82 UBI Ave 4 #06-02 Edward Boustead Centre, Singapore 408832 | TEL: 65-6841-9728 | URL : www.hochikiasiapacific.com

08/2024

Specifications subject to change without notice.