
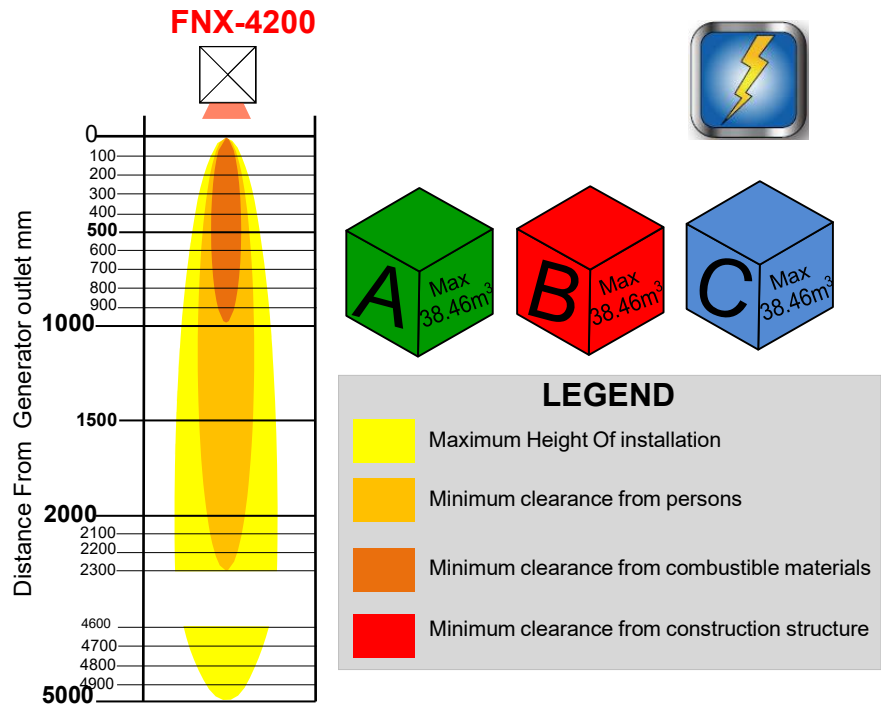


# HOCHIKI FirePro.

## FNX-4200/S/T/TS

Condensed Aerosol Generators

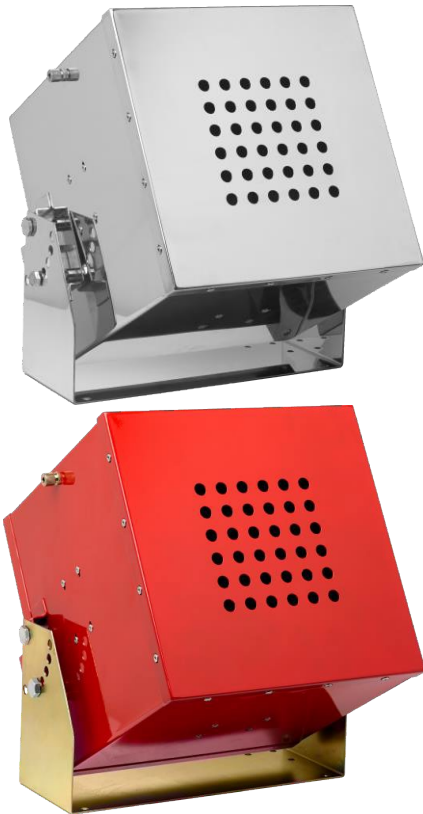

### Technical Data

<b>Mass of FPC</b> (Aerosol Generating Solid Compound)	4200 g				
<b>Generators gross weight</b>	<b>Weight</b>	23600 g			
	<b>Tolerance</b>	± 5%			
<b>Activation mode/s</b>	<b>Electrically</b>				
<b>Value of activation</b>	1.5 V DC , 0.8 A				
<b>FPC activation device</b>	Heating elements with 1.6-3.6 Ω Resistance				
<b>Activation line supervision current (Max)</b>	5 mA				
<b>Aerosol discharge time</b>	<b>Min.</b>	15 seconds			
	<b>Max</b>	20 seconds			
<b>Number of discharge outlet</b>	1				
<b>Generator dimension</b>	<b>Height</b>	<b>Width</b>	<b>Length</b>		
	300 mm	300 mm	300 mm		
<b>Self-activation temperature of FPC</b>	300° C				
<b>Classes of Fire</b> (NFPA 2010)	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>K</b>
	√	√	√	NO	NO
<b>Generator Coverage Constraints</b>	Min ht: 0.45 m		Max area: 32 m <sup>2</sup>		
<b>Maximum height of installation</b>	5 m				
<b>Minimum clearance (mm)</b>	<b>From persons</b>	<b>From combustible material</b>	<b>From Generator's Casing</b>		
	2300 mm	990 mm	6.4 mm		
<b>Environmental parameters</b>	<b>ODP<sup>1</sup></b>	<b>GWP<sup>2</sup></b>	<b>ALT<sup>3</sup></b>		
	Zero	Zero	Negligible <sup>4</sup>		
<b>Technical Parameters</b>	<b>Electrical conductivity</b>	<b>Corrosion</b>	<b>Oxygen depletion After discharge</b>		
	Nil up to 75KV	Negligible <sup>4</sup>	Negligible <sup>4</sup>		
<b>Note</b>	<b>1</b>	ODP: Ozone Depletion Potential	<b>3</b>	ALT: Atmospheric Life Time	
	<b>2</b>	GWP: Global Warming Potential	<b>4</b>	Within the parameters for use	

HOCHIKI ASIA PACIFIC PTE. LTD.

ADD: 82 UBI Ave 4 #06-02 Edward Boustead Centre, Singapore 408832 | TEL: 65-6841-9728 | URL : www.hochikiasiapacific.com

08/2024

Specifications subject to change without notice.